


Thermal Management

Dc Fans, Heat Sinks & Peltier Devices

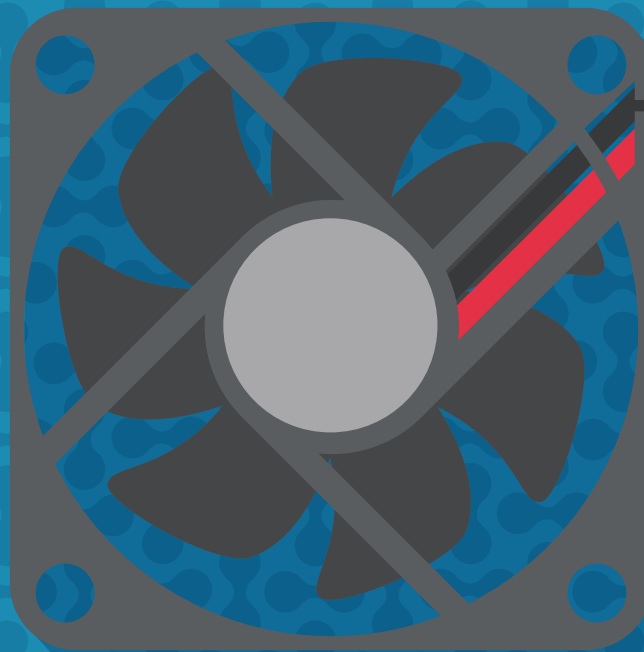

DEFEAT HEAT


As the heat in applications continues to rise due to increasing power densities, addressing your growing thermal management needs has become more crucial than ever. To help keep your design running at its peak condition, we have developed a thermal management portfolio that encompasses a range of dc fans, heat sinks, and Peltier thermoelectric cooling devices.

ENGINEERING TOOLS



Parametric Search

With hundreds of dc fans, heat sinks, and Peltier devices to choose from, utilize our online parametric search tool to quickly find and compare models based on your key specifications.



3D Models

CUI's library of ready-made 3D models helps to streamline the design process, saving you precious time and resources. Users are able to view and download 3D models in all major mechanical CAD formats free of charge.



Thermal Calculators



Use our airflow and thermal conversion calculators to quickly convert between common units for volume airflow, air velocity, thermal resistance, specific heat, thermal conductivity, and thermal conductance.

GLOBAL STOCK AVAILABILITY

Our network of global distribution partners provides you with quick and easy access to hundreds of our thermal management products, ready to ship same day across the globe. This strong distribution presence provides our customers with peace of mind knowing that their project will be supported from prototype all the way to production by in-stock inventory and world-class supply chain programs.



THERMAL MANAGEMENT PRODUCT LINE



Dc Fans

Axial Fans & Centrifugal Blowers

- 40 ~ 120 mm frame sizes
- Airflows up to 200 CFM
- 5, 12, 24, 48 Vdc rated voltages
- Dual ball bearing & omniCOOL™ system construction
- Auto restart protection
- Tachometer signal, rotation detector & PWM control signal options
- 1,700 ~ 8,500 RPM rated speeds
- 0.04 ~ 5.22 in H₂O static pressures
- 10.7 ~ 69.9 dBA noise levels

Heat Sinks

Extruded & Stamped Versions

- Aluminum & copper heat sinks
- TO-218, TO-220, TO-252 & TO-263 transistor package types
- Thermal resistances down to 4.49°C/W at 75°C, nat conv
- Power dissipation ratings up to 16.7 W at 75°C, nat conv
- Black anodized & tin plated material finishes
- Available with or without solder pins
- Vertical or horizontal solder pin orientations


Peltier Devices

10 ~ 70 mm Package Sizes

- Profiles as low as 3 mm
- 0.8 ~ 15 A current ratings
- 72 up to 105°C ΔT_{max} (Th=50°C)
- Precise temperature control
- Solid state construction
- High performance modules with arcTEC™ structure
- Two-stage modules with high ΔT_{max}
- Peltier cooling units available with better seal structure

Custom Capabilities

Dc Fans	Heat Sinks	Peltier Devices
<p>Multiple External Modifications</p> <p>Custom Wires</p> <ul style="list-style-type: none"> • Tachometer signal • Rotation detector • PWM control signal • Modified wire lengths & gauges • Custom connectors 	<p>Multiple Production Methods</p> <ul style="list-style-type: none"> • Extrusion • Stamping • Forging • Die casting <p>Range of Materials</p> <p>Variety of Finishes</p> <ul style="list-style-type: none"> • Black, clear & color anodization • Chromate powder coating • Nickel & zinc plating <p>Hole Punching Options</p>	<p>Variety of Shapes & Sizes</p> <ul style="list-style-type: none"> • Square profiles up to 62 mm • Rectangular profile lengths up to 89 mm • Round profiles up to 50 mm in diameter • Available with or without center hole <p>Custom Wires</p> <ul style="list-style-type: none"> • Modified wire lengths • Custom connectors <p>Heat Sink Integrations</p> <ul style="list-style-type: none"> • Add heat sinks to our Peltier modules using thermal interface materials (TIM) for improved thermal performance



Thermal Integrations

In addition to our individual custom offerings, CUI's dc fans, heat sinks, and Peltier devices can be combined and mounted together using thermal interface materials (TIM) to achieve more complex custom thermal solutions. This capability allows us to meet your exact thermal requirements without compromise.



Headquarters
20050 SW 112th Avenue
Tualatin, Oregon 97062

1-800-275-4899

www.cui.com



© 2018 CUI Inc. All Rights Reserved. 01-2018-010-0382R

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.