

date 08/05/2022

page 1 of 4

SERIES: CP130 | DESCRIPTION: PELTIER MODULE

FEATURES

- arcTEC™ structure
- solid state device
- precise temperature control
- quiet operation





MODEL	input	input	internal	output		output	
	voltage¹	current²	resistance³	Qmax⁴		∆Tmax⁵	
	max	max	typ	T _h =27°C	T _h =50°C	T_h=27°C	T _h =50°C
	(Vdc)	[A]	[Ω±10%]	(W)	(W)	(°C)	(°C)
CP13535	24.1	13	1.4	200	224	68	75

Notes:

- 1. Maximum voltage at ΔT max and T_h =27°C 2. Maximum current to achieve ΔT max 3. Measured by AC 4-terminal method at 25°C


- 3. Maximum heat absorbed at cold side occurs at I_{max} , V_{max} , and $\Delta T=0^{\circ}C$ 5. Maximum temperature difference occurs at I_{max} , V_{max} , and Q=DW (ΔT max measured in a vacuum at 1.3 Pa)

SPECIFICATIONS


parameter	conditions/description	min	typ	max	units
solder melting temperature	connection between thermoelectric pairs	235			°C
assembly compression				1	MPa
hot side plate				80	°C
RoHS	yes				


MECHANICAL DRAWING



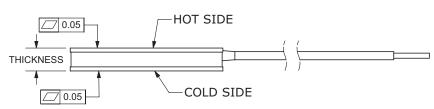


	MATERIAL	PLATING	
ceramic plate	96% AL ₂ O ₃		
wire leads	18 AWG	tin	
sealer	silicon rubber 703 RTV (between cold and hot side plates)		
joint cover	silicon rubber 703 F	RTV	
marking	P/N & S/N printed o	n cold side surface	

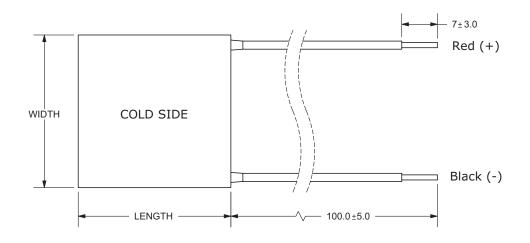




MODEL NO.	LENGTH	WIDTH	THICKNESS
	(mm)	(mm)	(mm)
CP13535	50 ±0.3	50 ±0.3	3.4 ±0.1

PERFORMANCE (Th=27°C)

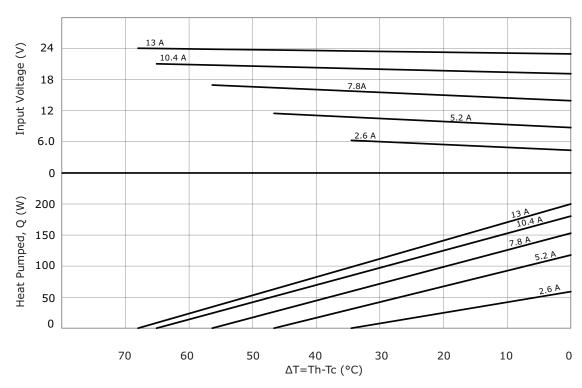

PERFORMANCE (Th=50°C)

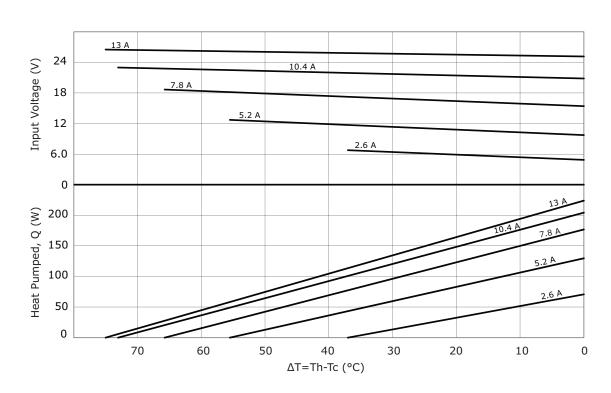

REVISION HISTORY

rev.	description	date
1.0	initial release	09/08/2016
1.01	updated performance curves	06/25/2018
1.02	changed thickness of CP13535	09/19/2018
1.03	brand update	10/30/2019
1.04	updated datasheet	11/30/2020
1.05	logo, datasheet style update	08/05/2022

The revision history provided is for informational purposes only and is believed to be accurate.



CUI Devices offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI Devices reserves the right to make changes to the product at any time without notice. Information provided by CUI Devices is believed to be accurate and reliable. However, no responsibility is assumed by CUI Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI Devices products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.